



+5V supply from digital board







Switching between CD and USB streamer is done by laser diode control signal when laser diode is off, streamer input is active

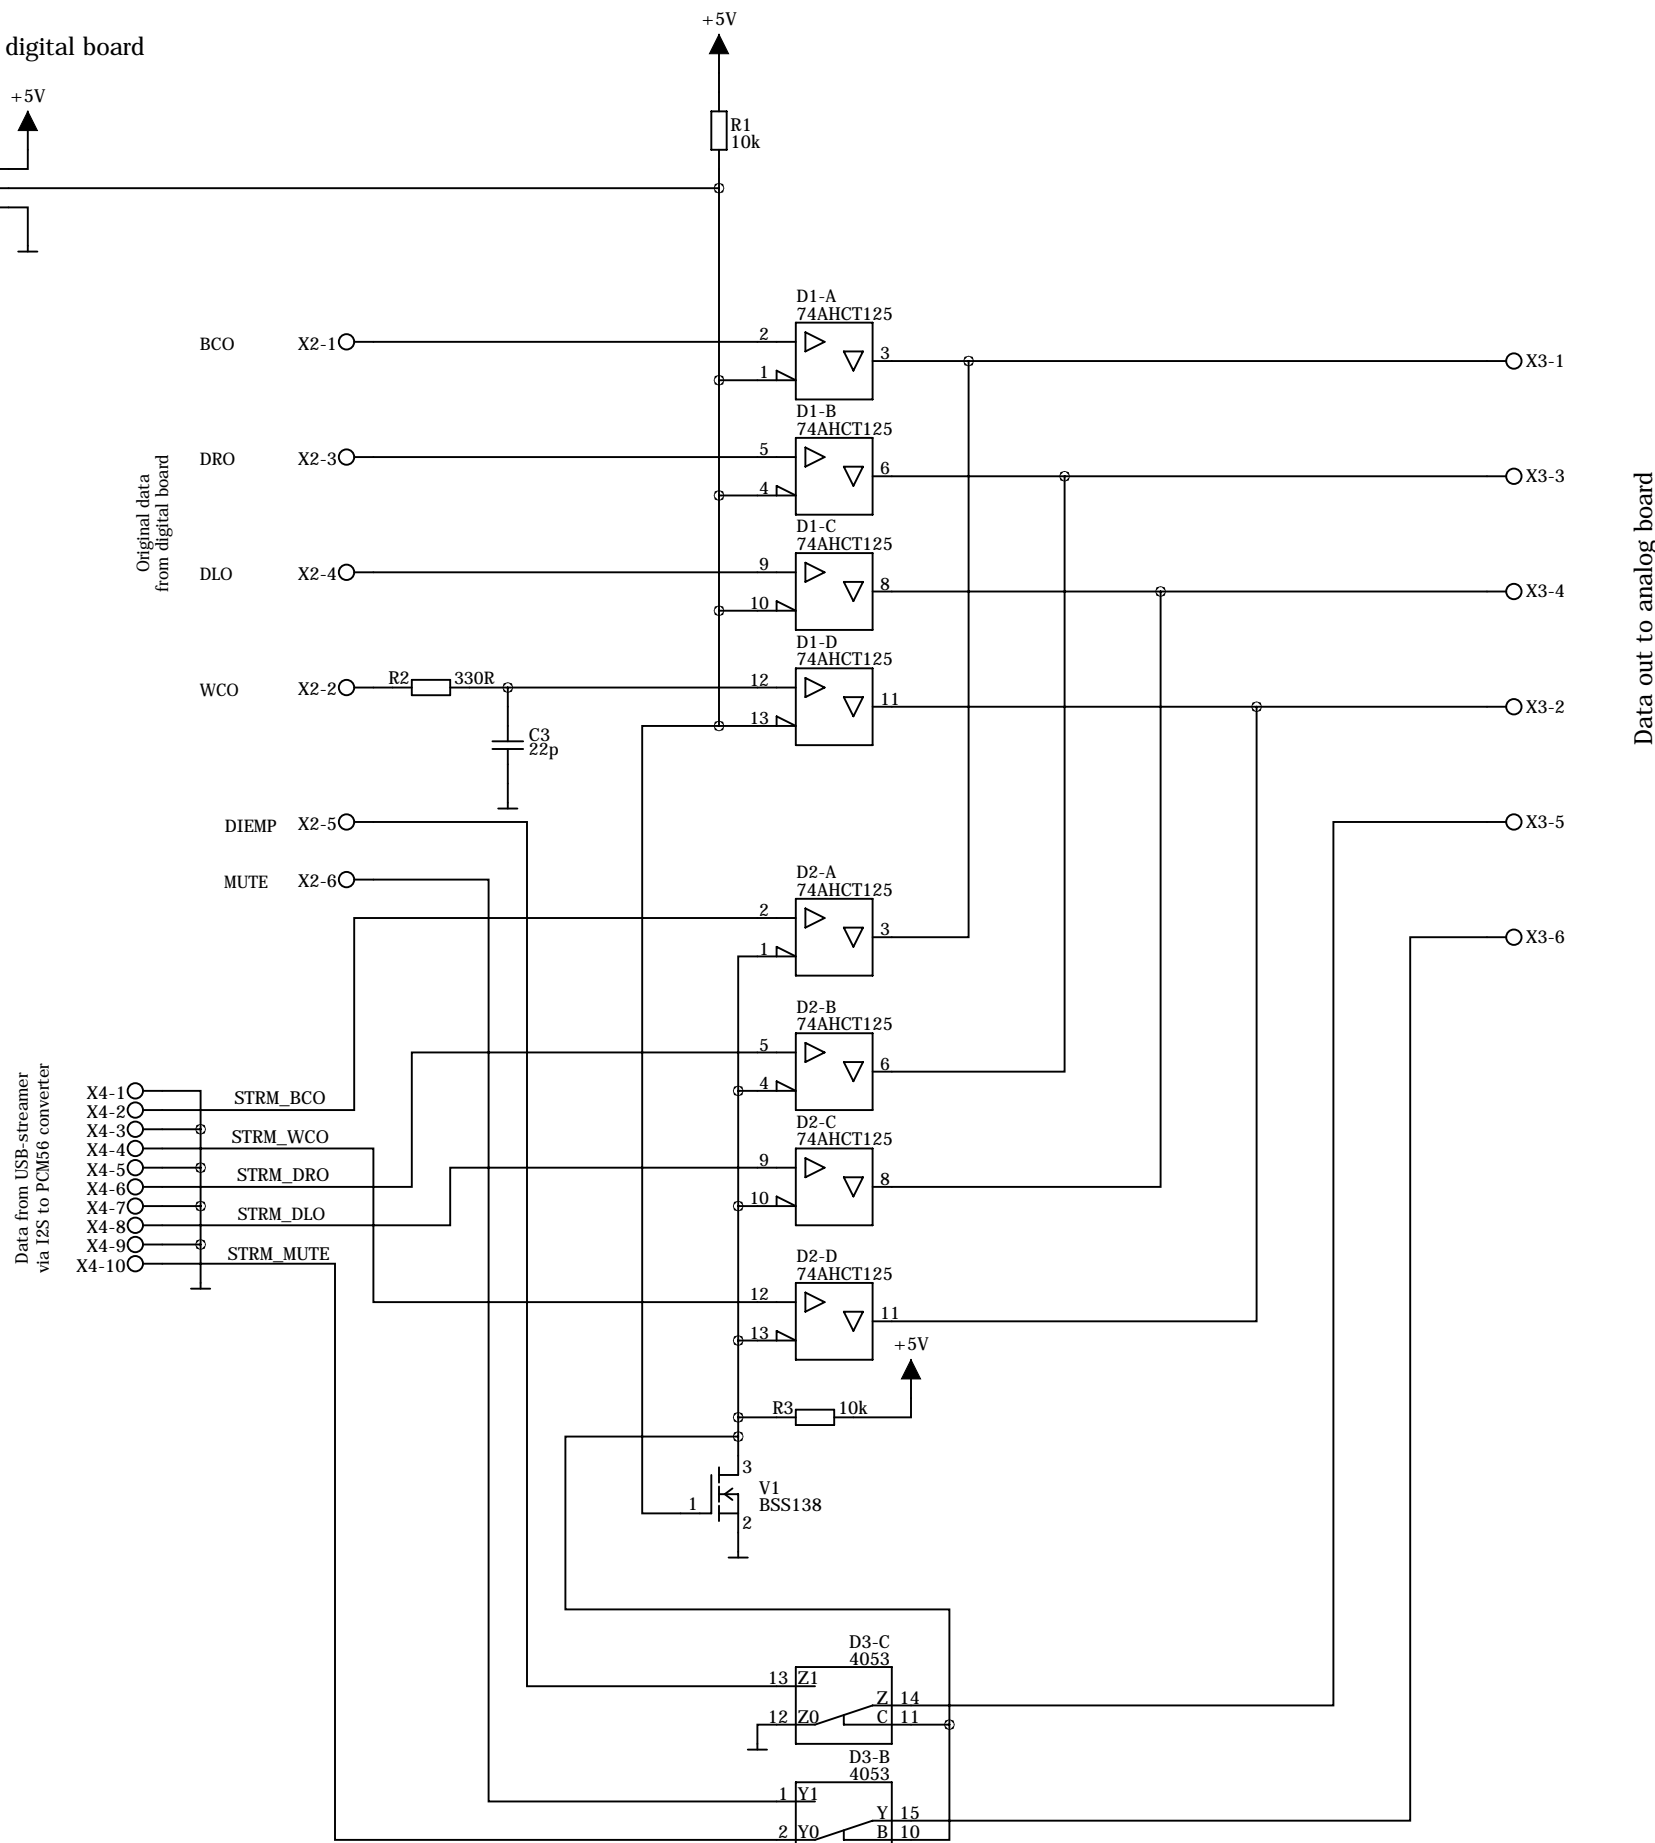

Mute/diemp multiplexer

Due to defaults used in CD player control processor, mute and de-emphasis controls need to be switched

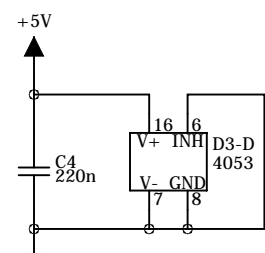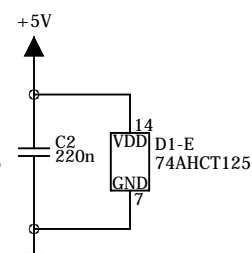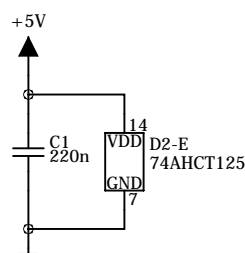

JTA
Design

Akai CD-73 USB streamer mod data mux
Sheet Description

Design date	File name	Version
2017-11-10	Hoffan Akai CD-data mux 01.sch	01
Sheet		1 OF 1